



Sanicom[®] 2

Sanicom[®] 2 is a commercial grey water lifting station featuring two powerful motors, ensuring continuity of service for your business.

WHY CHOOSE THIS PRODUCT?

Ideal for heavy commercial applications

Safe, reliable twin motor pump for continuity of service

Unit operates automatically

1/65 mm rear and two 80 mm side entries and air vent connection for external venting

Working temperature of 35°C

Will handle up to 90°C for short periods (5 minutes)

External hard-wired alarm

Alternates duty cycle

2 x pre mounted non return valves (supplied)

2 m pre wired cable





TECHNICAL CHARACTERISTICS


Discharge Pipework	40/50 mm
Motor Power	1500 Watts x 2
Voltages	220-240 V/50 Hz
Tank Volume	34.5 L
Working Waste Water Temp	35°C/Max 90°C (intermittent)
Product Weight	26 kg
Overall Measurements	582 x 486 x 529 mm
Inlet Pipework	50/65/80 mm
IP Rating	IP44

VERTICAL/HORIZONTAL PERFORMANCE

Increase size of horizontal run by one pipe size after 5m. All horizontal pipework requires a minimum of 1:100 fall.

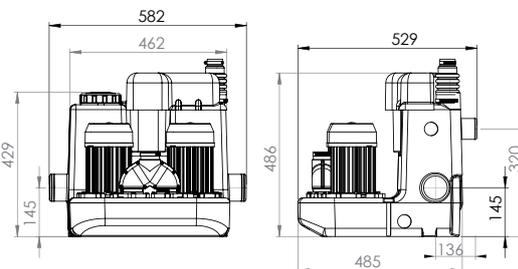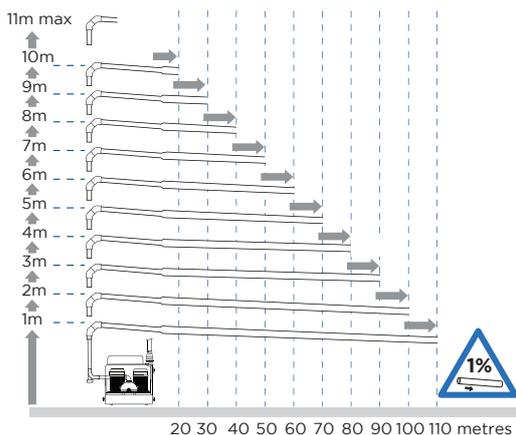

FLOW RATE PERFORMANCE CHART

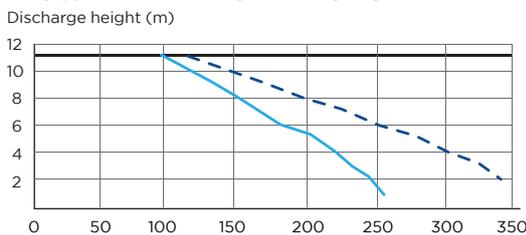

P1 - Output flow rate with one motor engaged
 P1 + P2 - Output flow rate with two motors engaged (litres/min)

APPLICATIONS



HAND BASIN



BATH



SHOWER



WASHING MACHINE



DISH WASHER



KITCHEN SINK



WMTS 106:2019
 Certificate No. 23048
 Manufacturer: SFA
 Brand: Saniflo

PRODUCT REFERENCE:
 SA108



Wired alarm panel (optional)



External mounted control box

